



C L I F F - T E K

Task & Accent Lighting Solutions




About Us

Cliff-Tek Industries was born from a passion for innovative lighting solutions. As a family-owned business, we specialize in cutting-edge LED accent lighting that combines advanced technology with thoughtful design. Our team's commitment to quality and personalized service ensures that every client receives tailored lighting solutions that transform ordinary spaces into extraordinary visual experiences.


TABLE OF CONTENTS

3	NEON TUNABLE TOP BEND
5	NEON SINGLE COLOR TOP BEND
7	NEON TUNABLE SIDE BEND
9	NEON SINGLE COLOR SIDE BEND
11	TUNABLE TAPE LIGHT
13	SINGLE COLOR TAPE LIGHT
15	ASSEMBLED FIXTURES
19	TAPE LIGHT KITS
20	ACCESSORIES


Neon Tunable TOP BEND

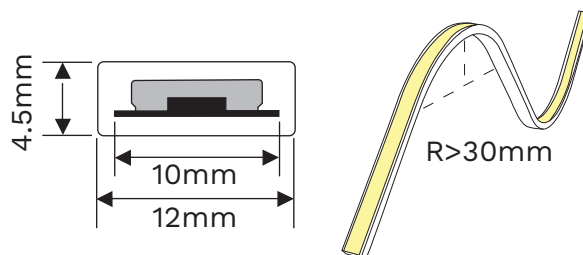


SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-NF12F-475L-6W5M-TW	475 lm	6.1W	2" (50mm)	16.4 ft (5m)	2700k - 5000k



2700k



3000k



4000k



5000k

Power Supply

	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee


Wireless Controllers and Receivers

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-TW-WT	Bluetooth Controller/ Decora opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-TW-WT	Zigbee Controller/ Decora opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in

Accessories

	SKU	Type	Dimensions
	L-NF12F-MNT-CLIP	Mounting Clip	.98" x .71" x .31"
	L-NF12F-EC	End Cap	.65" x .55" x .28"
	L-NF12F-T3P-CON-TTT	Connector Tape to Tape	1.40" x .67" x .33"
	L-NF12F-T3P-CON-WTT	Connector Wire to Tape	1.40" x .67" x .33"
	L-NF12F-T3P-CON-6J	Connector Tape to Tape	9.42" x .67" x .33"
	CTL-CW-3W20GA-1	Connection Wire 20-Gauge, 3-Wire Sold by the foot	1/8" Diameter (Min 10 ft - Max 1000 ft)
	CTL-CW-2W20GA-25 CTL-CW-2W20GA-50 CTL-CW-2W20GA-100	Connection Wire 20-Gauge, 2-Wire 25ft / 50ft / 100ft	1/8" Diameter

Neon Single Color TOP BEND

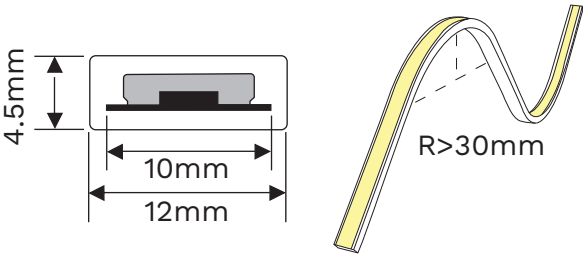

SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-NF12F-400L-5W5M-30	400 lm	4.2W	2" (50mm)	16.4 ft (5m)	3000k
L-NF12F-400L-5W5M-40	400 lm	4.2W	2" (50mm)	16.4 ft (5m)	4000k



3000k



4000k

Power Supply

	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee


Wireless Controllers and Receivers

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-SC-WT	Bluetooth Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-SC-WT	Zigbee Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in


Accessories

	SKU	Type	Dimensions
	L-NF12F-MNT-CLIP	Mounting Clip	12mm x 5mm
	L-NF12F-S2P-CON-TTT	Connector Tape to Tape	1.40" x .67" x .33"
	L-NF12F-S2P-CON-WTT	Connector Wire to Tape	1.40" x .67" x .33"
	L-NF12F-S2P-CON-6J	Connector Tape to Tape	9.42" x .67" x .33"
	CTL-CW-2W20GA-1	Connection Wire 20-Gauge, 2-Wire Sold by the foot	1/8" Diameter (Min 10 ft - Max 1000 ft)
	CTL-CW-2W20GA-25 CTL-CW-2W20GA-50 CTL-CW-2W20GA-100	Connection Wire 20-Gauge, 2-Wire 25ft / 50ft / 100ft	1/8" Diameter


Neon Tunable SIDE BEND

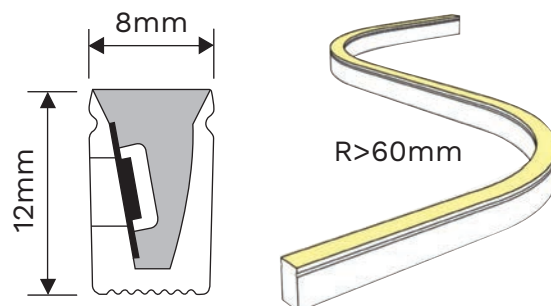


SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-NF8R-80L-3W-1M-TW	82 lm	3W	2" (50mm)	3.3 ft (1m)	2700k - 5000k
L-NF8R-80L-3W-2M-TW	82 lm	3W	2" (50mm)	6.6 ft (2m)	2700k - 5000k
L-NF8R-80L-3W-3M-TW	82 lm	3W	2" (50mm)	9.8 ft (3m)	2700k - 5000k
L-NF8R-80L-3W-5M-TW	82 lm	3W	2" (50mm)	16.4 ft (5m)	2700k - 5000k



2700k



3000k



4000k



5000k

Power Supply

	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee


Wireless Controllers and Receivers

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-TW-WT	Bluetooth Controller/ Decora opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-TW-WT	Zigbee Controller/ Decora opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in

Accessories

	SKU	Type	Dimensions
	L-NF8R-MNT-CLIP	Mounting Clip	.98" x .41" x .53"
	L-NF8R-EC	End Cap	.79" x .57" x .41"
	CTL-CW-3W20GA-1	Connection Wire 20-Gauge, 3-Wire Sold by the foot	1/8" Diameter (Min 10 ft - Max 1000 ft)
	CTL-CW-3W20GA-25	Connection Wire 20-Gauge, 3-Wire 25ft / 50ft / 100ft	1/8" Diameter
	CTL-CW-3W20GA-50 CTL-CW-3W20GA-100		

Neon Single Color SIDE BEND

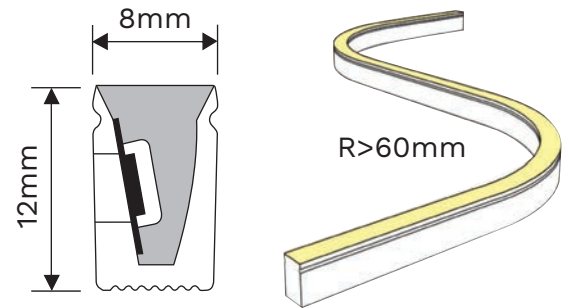

SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-NF8R-100L-3W-1M-30	108 lm	3W	2" (50mm)	3.3 ft (1m)	3000k
L-NF8R-100L-3W-1M-40	108 lm	3W	2" (50mm)	3.3 ft (1m)	4000k
L-NF8R-100L-3W-2M-30	108 lm	3W	2" (50mm)	6.6 ft (2m)	3000k
L-NF8R-100L-3W-2M-40	108 lm	3W	2" (50mm)	6.6 ft (2m)	4000k
L-NF8R-100L-3W-3M-30	108 lm	3W	2" (50mm)	9.8 ft (3m)	3000k
L-NF8R-100L-3W-3M-40	108 lm	3W	2" (50mm)	9.8 ft (3m)	4000k
L-NF8R-100L-3W-5M-30	108 lm	3W	2" (50mm)	16.4 ft (5m)	3000k
L-NF8R-100L-3W-5M-40	108 lm	3W	2" (50mm)	16.4 ft (5m)	4000k

Power Supply

	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee


Wireless Controllers and Receivers

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-SC-WT	Bluetooth Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-SC-WT	Zigbee Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in


Accessories

	SKU	Type	Dimensions
	L-NF8R-MNT-CLIP	Mounting Clip	.98" x .41" x .53"
	L-NF8R-EC	End Cap	.79" x .57" x .41"
	CTL-CW-2W20GA-1	Connection Wire 20-Gauge, 2-Wire Sold by the foot	1/8" Diameter Length (Min 10 ft - Max 1000 ft)
	CTL-CW-2W20GA-25 CTL-CW-2W20GA-50 CTL-CW-2W20GA-100	Connection Wire 20-Gauge, 2-Wire 25ft / 50ft / 100ft	1/8" Diameter


Tunable Tape Light

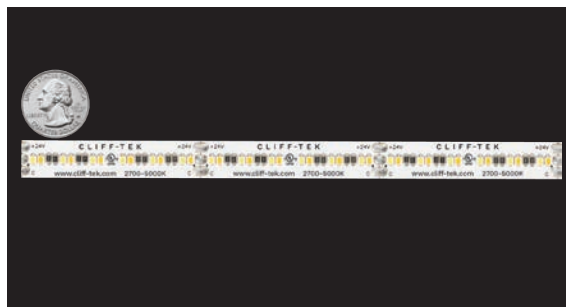


SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-TW-150L-2W-16F-TW	150 lm	2W	2" (50mm)	16.4 ft (5m)	2700k - 5000k
L-TW-150L-2W-98F-TW	150 lm	2W	2" (50mm)	98.4 ft (30m)	2700k - 5000k
L-TW-300L-3W-16F-TW	300 lm	3.35W	2" (50mm)	16.4 ft (5m)	2700k - 5000k
L-TW-300L-3W-98F-TW	300 lm	3.35W	2" (50mm)	98.4 ft (30m)	2700k - 5000k
L-TW-600L-5W-16F-TW	600 lm	4.57W	2.17" (55mm)	16.4 ft (5m)	2700k - 5000k
L-TW-600L-5W-98F-TW	600 lm	4.57W	2.17" (55mm)	98.4 ft (30m)	2700k - 5000k



2700k



3000k



4000k



5000k

Power Supply

	SKU	Dimensions	Input	Output	Dimmable
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee

Wireless Controllers and Receivers

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-TW-WT	Bluetooth Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-TW-WT	Zigbee Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in

Accessories

	SKU	Type	Dimensions
	L-CON-3P-10MM-TTT	10mm Connector Tape to Tape	.53" x .45" x .19"
	L-CON-3P-10MM-WTT	10mm Connector Wire to Tape	.53" x .45" x .21"
	L-AH-45D-FR-40 L-AH-45D-FR-79	40" (1m) / 79" (2m) LED Corner Housing Frosted Lens	39.37" x .78" x .66" 78.75" x .78" x .66"
	L-AH-MP-FR-40 L-AH-MP-FR-79	40" (1m) / 79" (2m) LED Multi-Purpose Housing Frosted Lens	39.37" x .69" x .42" 78.75" x .69" x .42"
	CTL-CW-3W20GA-1	Connection Wire 20-Gauge, 3-Wire Sold by the foot	1/8" Diameter Length (Min 10 ft - Max 1000 ft)
	CTL-CW-3W20GA-25 CTL-CW-3W20GA-50 CTL-CW-3W20GA-100	Connection Wire 20-Gauge, 3-Wire 25ft / 50ft / 100ft	1/8" Diameter

Single Color Tape Light



SKU	Lumens/Foot	Watts/Foot	Cut	Length	Color Temp
L-SW-150L-2W-16F-30	150 lm	1.25W	2" (50mm)	16.4 ft (5m)	3000k
L-SW-150L-2W-16F-40	150 lm	1.25W	2" (50mm)	16.4 ft (5m)	4000k
L-SW-150L-2W-98F-30	150 lm	1.25W	2" (50mm)	98.4 ft (30m)	3000k
L-SW-150L-2W-98F-40	150 lm	1.25W	2" (50mm)	98.4 ft (30m)	4000k
L-SW-300L-3W-16F-30	300 lm	2.3W	2" (50mm)	16.4 ft (5m)	3000k
L-SW-300L-3W-16F-40	300 lm	2.3W	2" (50mm)	16.4 ft (5m)	4000k
L-SW-300L-3W-98F-30	300 lm	2.3W	2" (50mm)	98.4 ft (30m)	3000k
L-SW-300L-3W-98F-40	300 lm	2.3W	2" (50mm)	98.4 ft (30m)	4000k
L-SW-600L-5W-16F-30	600 lm	4.57W	2" (50mm)	16.4 ft (5m)	3000k
L-SW-600L-5W-16F-40	600 lm	4.57W	2" (50mm)	16.4 ft (5m)	4000k
L-SW-600L-5W-98F-30	600 lm	4.57W	2" (50mm)	98.4 ft (30m)	3000k
L-SW-600L-5W-98F-40	600 lm	4.57W	2" (50mm)	98.4 ft (30m)	4000k

Power Supply

	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee

Wireless Controllers and Receivers



	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WD-1Z-SC-WT	Bluetooth Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WR-192W	Bluetooth Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-SC-WT	Zigbee Controller/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WR-192W	Zigbee Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in

Accessories

	SKU	Type	Dimensions
	L-CON-2P-10MM-TTT	Screw Connector Tape to Tape	.58" x .46" x .28"
	L-CON-2P-10MM-WTT	Screw Connector Wire to Tape	.58" x .46" x .28"
	L-CON-2P-10MM-LT	Screw Connector L-Shape or T-Shape	.75" x .46" x .28"
	L-CON-2P-SNP-TTT	Snap Connector Tape to Tape	.75" x .53" x .28"
	L-CON-2P-SNP-WTT	Snap Connector Wire to Tape	.85" x .53" x .28"
	L-CON-2P-SNP-L	Snap Connector L-Shape	.85" x .53" x .28"
	L-AH-45D-FR-40 L-AH-45D-FR-79	40" (1m) / 79" (2m) LED Corner Housing Frosted Lens	39.37" x .78" x .66" 78.75" x .78" x .66"
	L-AH-MP-FR-40 L-AH-MP-FR-79	40" (1m) / 79" (2m) LED Multi-Purpose Housing Frosted Lens	39.37" x .69" x .42" 78.75" x .69" x .42"
	CTL-CW-2W20GA-1	Connection Wire 20 Gauge, 2-Wire Sold by the foot	1/8" Diameter Length (Min 10 ft - Max 1000 ft)
	CTL-CW-2W20GA-25 CTL-CW-2W20GA-50 CTL-CW-2W20GA-100	Connection Wire 20-Gauge, 2-Wire 25ft / 50ft / 100ft	1/8" Diameter

Assembled Fixtures - SINGLE WHITE

MULTI-PURPOSE HOUSING

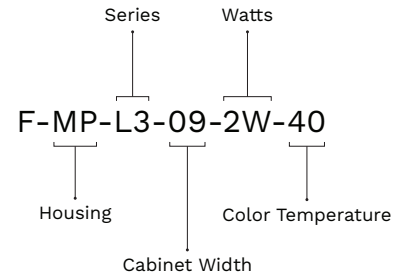



Cliff-Tek's assembled fixtures with multi-purpose housing are available in single white or tunable white options, delivering streamlined, ready-to-install solutions for consistent or adjustable lighting in a variety of indoor applications.

Single white - "30" indicates 3000k, "40" indicates 4000k.

SKU	Cab Width	Length	L1 series (150 lm/ft)	L3 series (300 lm/ft)	L6 series (600 lm/ft)
			Watts	Watts	Watts
F-MP-[L1/L3/L6]-09-[*W]-[30/40]	9"	7"	1W	2W	3W
F-MP-[L1/L3/L6]-12-[*W]-[30/40]	12"	8 15/16"	1W	2W	4W
F-MP-[L1/L3/L6]-15-[*W]-[30/40]	15"	12 7/8"	2W	3W	5W
F-MP-[L1/L3/L6]-18-[*W]-[30/40]	18"	14 7/8"	2W	3W	6W
F-MP-[L1/L3/L6]-21-[*W]-[30/40]	21"	18 13/16"	2W	4W	7W
F-MP-[L1/L3/L6]-24-[*W]-[30/40]	24"	20 3/4"	3W	4W	8W
F-MP-[L1/L3/L6]-27-[*W]-[30/40]	27"	24 11/16"	3W	5W	9W
F-MP-[L1/L3/L6]-30-[*W]-[30/40]	30"	26 11/16"	3W	5W	10W
F-MP-[L1/L3/L6]-33-[*W]-[30/40]	33"	30 5/8"	4W	6W	12W
F-MP-[L1/L3/L6]-36-[*W]-[30/40]	36"	32 9/16"	4W	7W	13W
F-MP-[L1/L3/L6]-39-[*W]-[30/40]	39"	36 1/2"	4W	7W	14W
F-MP-[L1/L3/L6]-42-[*W]-[30/40]	42"	38 1/2"	4W	8W	15W
F-MP-[L1/L3/L6]-45-[*W]-[30/40]	45"	42 7/16"	5W	8W	16W
F-MP-[L1/L3/L6]-48-[*W]-[30/40]	48"	44 3/8"	5W	9W	17W

Assembled Fixtures - TUNABLE WHITE

MULTI-PURPOSE HOUSING

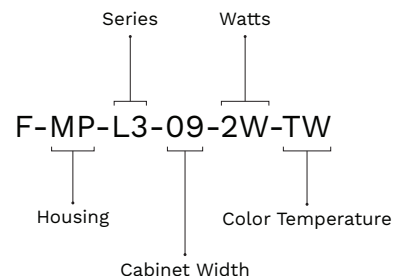



Cliff-Tek's assembled fixtures with multi-purpose housing are available in single white or tunable white options, delivering streamlined, ready-to-install solutions for consistent or adjustable lighting in a variety of indoor applications.

Tunable white - color temperature is adjustable from 2700k to 5000k.

SKU	Cab Width	L1 series (150 lm/ft)		L3 series (300 lm/ft)		L6 series (600 lm/ft)	
		Length	Watts	Length	Watts	Length	Watts
F-MP-[L1/L3/L6]-09-[*W]-TW	9"	6 1/2"	1W	6 1/2"	2W	7 1/8"	3W
F-MP-[L1/L3/L6]-12-[*W]-TW	12"	8 1/2"	2W	8 1/2"	2W	9 5/16"	4W
F-MP-[L1/L3/L6]-15-[*W]-TW	15"	12 7/16"	2W	12 7/16"	3W	11 7/16"	5W
F-MP-[L1/L3/L6]-18-[*W]-TW	18"	14 3/8"	3W	14 3/8"	3W	15 3/4"	6W
F-MP-[L1/L3/L6]-21-[*W]-TW	21"	18 5/16"	3W	18 5/16"	4W	17 15/16"	7W
F-MP-[L1/L3/L6]-24-[*W]-TW	24"	20 5/16"	4W	20 5/16"	4W	20 1/8"	8W
F-MP-[L1/L3/L6]-27-[*W]-TW	27"	24 1/4"	4W	24 1/4"	5W	24 7/16"	9W
F-MP-[L1/L3/L6]-30-[*W]-TW	30"	26 3/16"	5W	26 3/16"	5W	26 5/8"	10W
F-MP-[L1/L3/L6]-33-[*W]-TW	33"	30 1/8"	5W	30 1/8"	6W	30 15/16"	12W
F-MP-[L1/L3/L6]-36-[*W]-TW	36"	32 1/8"	6W	32 1/8"	7W	33 1/8"	13W
F-MP-[L1/L3/L6]-39-[*W]-TW	39"	36 1/16"	6W	36 1/16"	7W	35 1/4"	14W
F-MP-[L1/L3/L6]-42-[*W]-TW	42"	38"	7W	38"	8W	39 5/8"	15W
F-MP-[L1/L3/L6]-45-[*W]-TW	45"	41 15/16"	7W	41 15/16"	8W	41 3/4"	16W
F-MP-[L1/L3/L6]-48-[*W]-TW	48"	43 15/16"	8W	43 15/16"	9W	43 15/16"	17W

Assembled Fixtures - SINGLE WHITE

45-DEGREE HOUSING

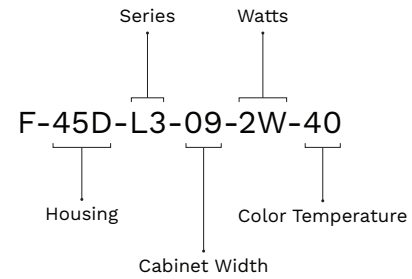



Cliff-Tek's tunable assembled fixtures with 45-degree housing provide streamlined, ready-to-install solutions for consistent, adjustable lighting in a variety of indoor applications.

Single white - "30" indicates 3000k, "40" indicates 4000k.

SKU	Cab Width	Length	L1 series (150 lm/ft)	L3 series (300 lm/ft)	L6 series (600 lm/ft)
			Watts	Watts	Watts
F-45D-[L1/L3/L6]-09-[*W]-[30/40]	9"	7"	1W	2W	3W
F-45D-[L1/L3/L6]-12-[*W]-[30/40]	12"	8 15/16"	1W	2W	4W
F-45D-[L1/L3/L6]-15-[*W]-[30/40]	15"	12 7/8"	2W	3W	5W
F-45D-[L1/L3/L6]-18-[*W]-[30/40]	18"	14 7/8"	2W	3W	6W
F-45D-[L1/L3/L6]-21-[*W]-[30/40]	21"	18 13/16"	2W	4W	7W
F-45D-[L1/L3/L6]-24-[*W]-[30/40]	24"	20 3/4"	3W	4W	8W
F-45D-[L1/L3/L6]-27-[*W]-[30/40]	27"	24 11/16"	3W	5W	9W
F-45D-[L1/L3/L6]-30-[*W]-[30/40]	30"	26 11/16"	3W	5W	10W
F-45D-[L1/L3/L6]-33-[*W]-[30/40]	33"	30 5/8"	4W	6W	12W
F-45D-[L1/L3/L6]-36-[*W]-[30/40]	36"	32 9/16"	4W	7W	13W
F-45D-[L1/L3/L6]-39-[*W]-[30/40]	39"	36 1/2"	4W	7W	14W
F-45D-[L1/L3/L6]-42-[*W]-[30/40]	42"	38 1/2"	4W	8W	15W
F-45D-[L1/L3/L6]-45-[*W]-[30/40]	45"	42 7/16"	5W	8W	16W
F-45D-[L1/L3/L6]-48-[*W]-[30/40]	48"	44 3/8"	5W	9W	17W

Assembled Fixtures - TUNABLE WHITE

45-DEGREE HOUSING

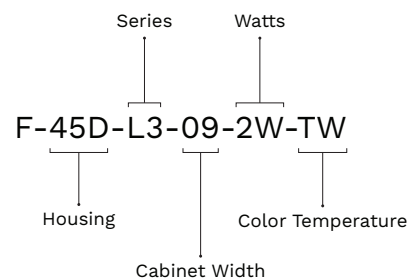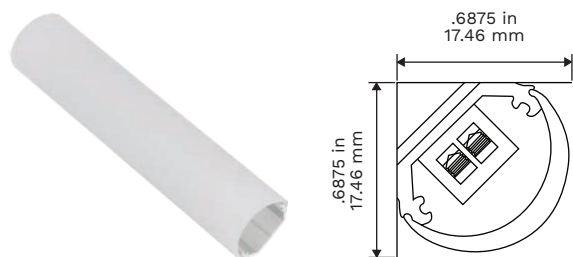


Cliff-Tek's tunable assembled fixtures with 45-degree housing provide streamlined, ready-to-install solutions for consistent, adjustable lighting in a variety of indoor applications.

Tunable white - color temperature is adjustable from 2700k to 5000k.

SKU	Cab Width	L1 series (150 lm/ft)		L3 series (300 lm/ft)		L6 series (600 lm/ft)	
		Length	Watts	Length	Watts	Length	Watts
F-45D-[L1/L3/L6]-09-[*W]-TW	9"	6 1/2"	1W	6 1/2"	2W	7 1/8"	3W
F-45D-[L1/L3/L6]-12-[*W]-TW	12"	8 1/2"	2W	8 1/2"	2W	9 5/16"	4W
F-45D-[L1/L3/L6]-15-[*W]-TW	15"	12 7/16"	2W	12 7/16"	3W	11 7/16"	5W
F-45D-[L1/L3/L6]-18-[*W]-TW	18"	14 3/8"	3W	14 3/8"	3W	15 3/4"	6W
F-45D-[L1/L3/L6]-21-[*W]-TW	21"	18 5/16"	3W	18 5/16"	4W	17 15/16"	7W
F-45D-[L1/L3/L6]-24-[*W]-TW	24"	20 5/16"	4W	20 5/16"	4W	20 1/8"	8W
F-45D-[L1/L3/L6]-27-[*W]-TW	27"	24 1/4"	4W	24 1/4"	5W	24 7/16"	9W
F-45D-[L1/L3/L6]-30-[*W]-TW	30"	26 3/16"	5W	26 3/16"	5W	26 5/8"	10W
F-45D-[L1/L3/L6]-33-[*W]-TW	33"	30 1/8"	5W	30 1/8"	6W	30 15/16"	12W
F-45D-[L1/L3/L6]-36-[*W]-TW	36"	32 1/8"	6W	32 1/8"	7W	33 1/8"	13W
F-45D-[L1/L3/L6]-39-[*W]-TW	39"	36 1/16"	6W	36 1/16"	7W	35 1/4"	14W
F-45D-[L1/L3/L6]-42-[*W]-TW	42"	38"	7W	38"	8W	39 5/8"	15W
F-45D-[L1/L3/L6]-45-[*W]-TW	45"	41 15/16"	7W	41 15/16"	8W	41 3/4"	16W
F-45D-[L1/L3/L6]-48-[*W]-TW	48"	43 15/16"	8W	43 15/16"	9W	43 15/16"	17W

Tape Light Kits

Tape Light + **Power Supply** + **Connectors** + **Wire** + **Control Option**



Single White Tape Light Touch Dimmer Kits

SKU	Description
K-SW150-16F-TD-[30, 40]	16 ft roll, 150 lm/ft tape light (3000k or 4000k), adhesive promoter wipe, 36W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, 72W touch dimmer.
K-SW300-16F-TD-[30, 40]	16 ft roll, 300 lm/ft tape light (3000k or 4000k), adhesive promoter wipe, 96W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, 72W touch dimmer.

Single White Tape Light Wireless Dimmer Kits

SKU	Description
K-SW150-16F-RF-[30, 40]	16 ft roll, 150 lm/ft tape light (3000k or 4000k), adhesive promoter wipe, 36W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.
K-SW300-16F-RF-[30, 40]	16 ft roll, 300 lm/ft tape light (3000k or 4000k), adhesive promoter wipe, 96W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.

Tunable White Tape Light Wireless Dimmer Kits

SKU	Description
K-TW150-16F-RF-TW	16 ft roll, 150 lm/ft tape light, adhesive promoter wipe, 36W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.
K-TW300-16F-RF-TW	16 ft roll, 300 lm/ft tape light, adhesive promoter wipe, 96W plug in power supply, 12 pcs wire-to-tape connectors, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.

Neon Top Bend Single White Tape Light Wireless Dimmer Kits

SKU	Description
K-NF12F-16F-RF-[30, 40]	16 ft roll, 400 lm/ft Neon Top Bend tape light (3000k or 4000k), adhesive promoter wipe, 96W plug in power supply, 6 pcs wire-to-tape connector, 2 pcs 6" jumper connector, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.

Neon Top Bend Tunable White Tape Light Wireless Dimmer Kits

SKU	Description
K-NF12F-16F-RF-TW	16 ft roll, 475 lm/ft Neon Top Bend tape light, adhesive promoter wipe, 96W plug in power supply, 6 pcs wire-to-tape connector, 2 pcs 6" jumper connector, 25 ft wire, dimming receiver, 1 zone wireless dimmer with cover plate.

Accessories

Bluetooth Controlled Items (RF)

	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-RF-WR-192W	Wireless RF Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-RF-WD-1Z-TW-WT	1 Zone Wireless RF Controller for Tunable White LED/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-RF-WD-1Z-SC-WT	Wireless RF Receiver/ Decora Opening	24V	24V	Hardwire or Plug in

Zigbee Controlled Items (ZB)



	SKU	Description/Dimensions	Input	Output	Power Source
	L-LC-ZB-WR-192W	Wireless ZB Receiver/ 5.71" x 1.83" x .63"	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-TW-WT	1 Zone Wireless ZB Controller for Tunable White LED/ Decora Opening	24V	24V	Hardwire or Plug in
	L-LC-ZB-WD-1Z-SC-WT	Wireless ZB Receiver/ Decora Opening	24V	24V	Hardwire or Plug in

Accessories

Power Supplies


	SKU	Dimensions	Input	Output	Dimming Source
	L-PS24V-HWD-96W	5" x 4.75" x 1.66"	120V	24V/96W	Triac/MLV/ELV RF/Zigbee
	L-PS24V-PI-36W	3.5" x 1.875" x 1.625"	120V	24V/36W	RF/Zigbee
	L-PS24V-PI-96W	6" x 2.375" x 1.5"	120V	24V/96W	RF/Zigbee

LED Housing

	SKU	Description	Dimensions
	L-AH-45D-FR-40	40" (1m) LED Corner Housing Frosted Lens	39.37" x .78" x .66"
	L-AH-45D-FR-79	79" (2m) LED Corner Housing Frosted Lens	78.75" x .78" x .66"
	L-AH-MP-FR-40	40" (1m) LED Multi-Purpose Housing Frosted Lens	39.37" x .69" x .42"
	L-AH-MP-FR-79	79" (2m) LED Multi-Purpose Housing Frosted Lens	78.75" x .69" x .42"

Accessories

Miscellaneous

	SKU	Description
	L-300LSE-10MM-36FT	10mm x 36 ft, 3M double sided tape
	L-ADH-PROM-WIPE	Adhesion promoter wipe packet. One time use.
	L-BC-MALE-2PIN	DC male barrel to 2-pin screw down connector
	L-BC-FEMALE-2PIN	DC female barrel to 2-pin screw down connector
	L-TDS-72W	Single white touch dimmer, 72W Max, 24VDC
	L-IR-SDS-72W	IR single door IR sensor, 72W Max, 24VDC
	L-IR-DDS-72W	IR double door IR sensor, 72W Max, 24VDC



4385 Fountain Hills Drive NE #201 Prior Lake, MN 55372 855-254-3835 Cliff-Tek.com

